
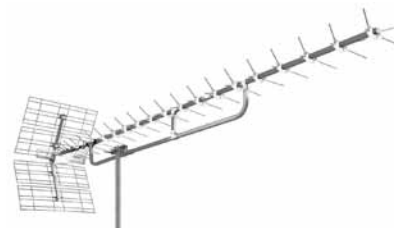


antenne UHF larga banda / UHF broadband antennas

LX Line

02

03

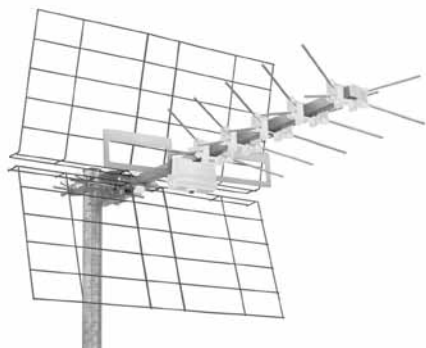

Indicate per la ricezione di segnali molto deboli sono costruite con doppi elementi in tondino d'alluminio Ø 4 mm, già montati sulla culla. I riflettori sono realizzati in rete prezincata e verniciata, a prova di corrosione. Sono molto apprezzate per la robustezza, per l'ottimo rapporto qualità/prezzo, per l'elevato guadagno e per l'alta direttività.

Suitable for the reception of poor signals, they are manufactured with double elements in Ø 4 mm aluminium round, already assembled on the cradle. The pre-varnished and pre-zinc-plated grid of the reflectors is corrosion-proofing. These antennas are highly appreciated for their strength, excellent quality/price ratio, high gain and elevated directivity.



01



	canali channels	codice code ICE	elementi elements	guadagno gain dB	rapporto AV/IN front-back ratio dB	angolo ap. orizzontale horizontal beamwidth	carico vento wind loading Kg	lunghezza length mm	imballo packing Pcs	peso weight Kg	volume volume mc
O1	21...69	24LX45	25	10...13	26	44°...26°	5.9	670	5	8.7	0.112
	21...60	24LX45L	21	10...13	26	44°...26°	5.8	617	5	8.5	0.112
O2	21...37	44LX4	37	13...15	28	40°...24°	7.6	1470	5	11	0.160
	37...69	44LX5	41	13...15	26	34°...24°	7.2	1230	5	10.5	0.128
	21...60	44LX45L	41	11...14.5	28	40°...24°	7.0	1170	5	10	0.128
O3	21...69	92LX45	93	12.5...17	30	34°...20°	14.9	2593	1	3.2	0.040
	21...60	92LX45L	93	12.5...17	30	34°...20°	14.9	2593	1	3.2	0.040

: **LTEfree** Limita disturbo LTE / Reduces LTE interference

Confezione: cartone singolo reclamizzato.

Packaging: advertised single carton.

