
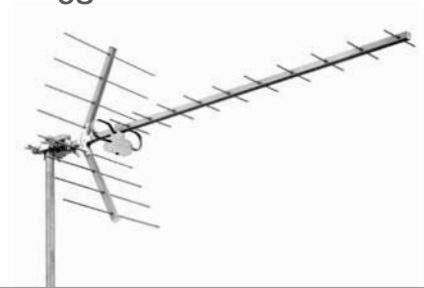


antenne UHF larga banda / UHF broadband antennas

Yagi

02

03

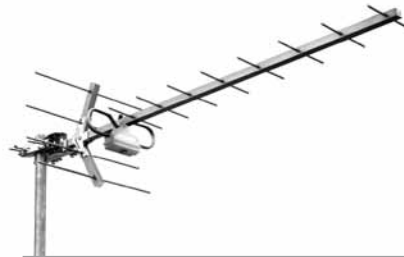

01

SILVER

LTEfree™

Le antenne brevettate Serie ICE di tipo Yagi sono realizzate in lega speciale di alluminio. Gli elementi in tondino pieno Ø 5 mm sono pre-montati e bloccati nella culla di sezione quadrata 18x18 mm. A ulteriore garanzia di durata nel tempo tutte le parti in lega speciale di alluminio sono protette con un particolare trattamento anticorrosivo di colore bianco. Sono molto robuste e l'installazione è semplice e rapida. Alcuni modelli sono forniti anche in versione "SILVER", ovvero prive del trattamento anticorrosivo.

The patented ICE range Yagi antennas are made in aluminium special alloy. The full aluminium rod elements Ø 5 mm are pre-mounted and blocked onto the square section 18x18 mm cradle. These antennas are very strong and the installation is simple and fast, but to guarantee the resistance of the aerial through the years all the aluminium parts are protected by a special white color anticorrosion treatment. Some models are also supplied in SILVER version without anticorrosion treatment.

canali channels	codice code ICE	codice code SILVER	elementi elements	guadagno gain dB	rapporto AV/IN front-back ratio dB	angolo ap. orizzontale horizontal beamwidth	carico vento wind loading Kg	lunghezza length mm	imballo packing Pcs	peso weight Kg	volume volume mc	
01*	21...37	11RB4	-	11	8...11.5	25	56°...30°	4.1	1235	10	12.8	0.159
	21...69	11RB45	-	11	8...10.5	25	56°...30°	3.9	1195	10	12	0.120
	38...69	11RB5	-	11	8...11.5	25	56°...30°	3.7	1195	10	14	0.120
	21...69	13RB45	-	13	8...11	25	56°...30°	4.0	1175	10	11	0.120
	21...60	11RB45L	11W45L	10	8...11	25	56°...30°	3.8	1147	10	13.2	0.120
	38...60	11RB5L	-	10	8...11.5	25	56°...30°	3.7	990	10	14.2	0.120
	21...60	13RB45L	13RW45L	12	8...11.5	25	56°...30°	4.0	1175	10	10.4	0.120
02**	21...37	13B4	13W4D	13	8...10.5	24	60°...30°	3.8	1175	10	11.4	0.159
	21...69	13B45	-	13	7...9.5	24	60°...28°	3.3	985	10	10.4	0.102
	38...69	13B5	-	13	8...10.5	24	58°...28°	3.2	995	10	10.2	0.102
	21...60	13B45L	13W45L	12	7...10	24	60°...28°	3.2	940	10	10.4	0.102
	38...60	13B5L	-	12	8...10.5	24	58°...28°	3.2	950	10	10.2	0.102
03•	21...37	19B4	-	19	9...12.5	24	56°...30°	5.6	1440	10	14	0.159
	21...69	19B45	-	19	8...11	24	56°...30°	5.1	1185	10	13	0.140
	38...72	19B5	-	19	8...11.5	24	56°...30°	4.6	1175	10	12.5	0.140
	21...60	19B45L	-	17	8...11.5	24	56°...30°	5.0	1155	10	13	0.140

■ : LTEfree™ Limita disturbo LTE / Reduces LTE interference

* Riflettore a rete / Net reflector

• Riflettore 8 elementi / 8-element reflector

** Riflettore 4 elementi / 4-element reflector

Confezione: sacchetto di polietilene.

Packaging: polyethylene bag.

